
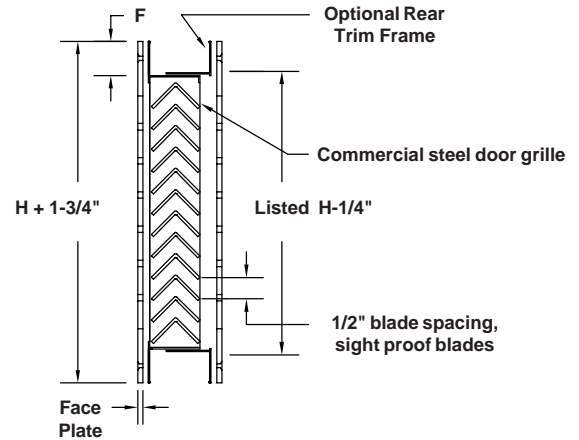


# SEC-4DG SECURITY DOOR GRILLE

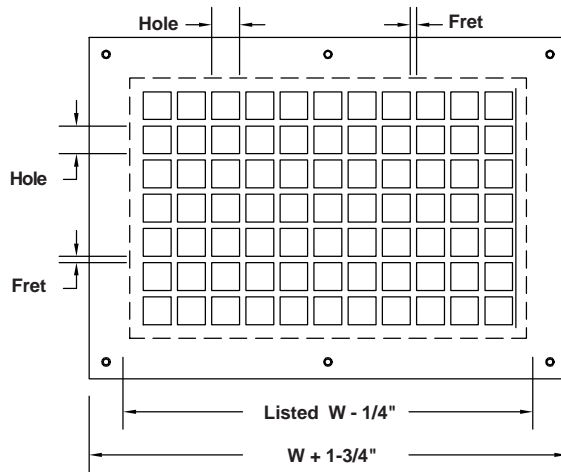

## STANDARD CONSTRUCTION

**Faces:** Two 12 ga. steel face plates covering commercial steel door grille. 1" face flange.

**Hole Pattern:** 13/16" square holes with 3/16" frets.

**Finish:** Two part polyurethane on face plates. White.

## REQUIRED CONSTRUCTION:

**Face Material:** ☐ 12 ga. steel (Std.)  
☐ 14 ga. steel  
☐ 10 ga. steel  
☐ Other \_\_\_\_\_

**Hole Pattern:** ☐ 13/16" square holes with 3/16" frets (Std.)  
☐ 3/4" square holes with 1/4" frets  
☐ 1/2" square holes with 3/16" frets  
☐ 5/16" round holes on 7/16" staggered centers  
☐ Other \_\_\_\_\_

**Flange "F":** ☐ 1" (Std.)  
☐ Other \_\_\_\_\_


**Finish:** ☐ White (Std.)  
☐ Other \_\_\_\_\_

**Other Material:** ☐ SEC-4DGA aluminum construction.  
☐ SEC-4DGSS stainless steel construction


## MOUNTING OPTIONS:

☐ **Rear Trim Frame:** Same material and thickness as commercial grille.

☐ **25.** Countersunk screw holes in face 10" o.c. with #10 x 1/2" long Torx security sheet metal screws. Other screw length \_\_\_\_\_




☐ **35.** Straight screw holes in face 10" o.c. with #10-24 x 2" long carriage bolts and Nylock nuts.



☐ **Other:** \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Qty.	Listed Size		Sleeve O.D.		Door Opening		Grille Thickness	Door Thickness	Trim Frame	Mounting Option	Tag
	W	H	W	H	W	H					

To maintain our policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>				<b>Location</b>						
<b>Architect / Engineer</b>				 <b>3601 East 18th Street                  Kansas City, MO 64127                  PH: (816) 231-5522                  Fax: (816) 231-8437</b>						
<b>Contractor</b>								<b>Dwg. No.</b>	SEC-4DGW 07/13/04	
<b>Representative</b>								<b>Date</b>		